


AR26LP LED Strobe Light for Switched Applications



SEQUENCER CONTROLS

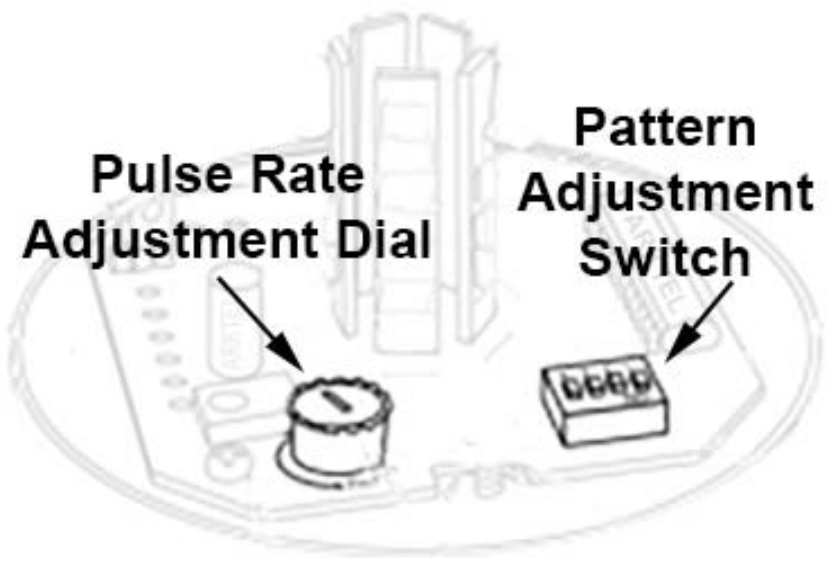

FLASH PATTERN

The on-board sequencer allows independent adjustment of flash speed and adjustment of flash pattern.

Always disconnect power before changing flash pattern!

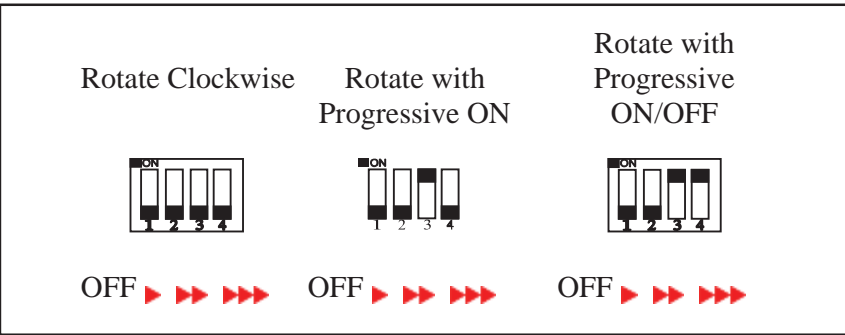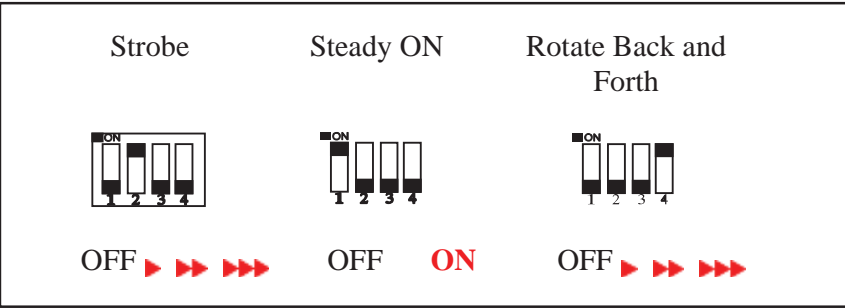

Adjustable flashing speed	30~260 flashes/minute
Operating life estimated	50,000+ hours
802.3af PoE Rating	4.26W _{LED} / 6.6W ("S" Siren model)
Operating temperature	-4°~144° F (-20°~65° C)

Please note, from time to time, as this product is continually being improved, features, the design, and appearance of this product is subject to change without notice.